

SHOOTER

Product Image




Project Data



Project: _____
 Location: _____
 Date: _____
 Remarks: _____
 Approve by: _____

Application Type: ONGROUND UPLIGHTER
 Product Name: SHOOTER
 Ordering Code: 9900-6-3-874-XX
 Lamp Type: LED
 Socket: N/A
 Watt: 20 W
 Lumen: 1900 lm
 Beam: 16°
 Kelvin: 4000 K

Dimension

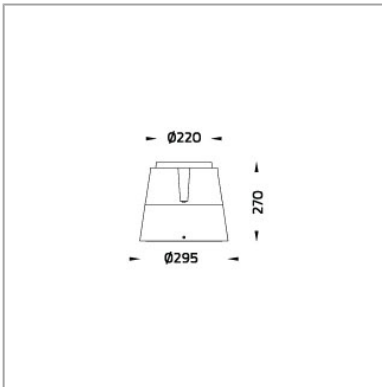

Light Distribution



*Due to the constancy of product development,
 we reserver the right to alter all specification
 without prior notice.

SHOOTER

Specification

IEC Standard	IEC 60598-1 General Requirement IEC 60598-2-1 Fixed Luminaires
Protection	IP67 Class I
IK Rating	Protection against mechanical impact IK10 on body and IK07 on optical part.
Luminaires Body Housing	High-pressure Die Cast Aluminium alloy body and components.
Coating Process	Nano Ceramic surface conversion, resistant to corrosive environment. Luminaire primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C.
Diffuser	Impact resistant safety tempered glass cover. Able to withstand the temperature up to 250°C.
Reflector	High performance anodized spun aluminium reflector.
Adjustable Optic	N/A
Gasket	Post-cured treated silicone gasket. Temperature and weather resistant. Working temperature -40°C to +200°C.
External screws	External screws are in stainless steel with protection grease.
Cable Entry	Cable entry protected by M20 cable gland. To be used with H05RN-F/ H07RN-F cable with 7-13mm. diameter.
LED	High quality AC LED module. Conform to safety standard and electromagnetic compatibility standard. The whole systems tested to be operated under maximum ambient environment up to +40°C.
Internal wire	Tinned copper conductor with silicone insulated internal wire. IMQ approved. Working temperature -40°C to +180°C.
Terminal Block/ Connector	Terminal block in GFR PA6.6 for cable with cross section up to 2.5 sqmm. VDE approved. Class1 luminaire provided with the earth connection.
Pre-wired cable	Pre-wired with 3x1.0 sqmm. H07RN-F neoprene cable. IMQ approved.
Caution	Installation work has to be carried on according to the enclosed installation manual.
Color	Black (replace the last 2 digits of ordering code with O1) Graphite (replace the last 2 digits of ordering code with O2) Dark Gray (replace the last 2 digits of ordering code with O3) Aluminium Silver (replace the last 2 digits of ordering code with O4) White (replace the last 2 digits of ordering code with O6)

SHOOTER

Accessories



Ordering Code: 9-2015-00

Anchor bolt kit for
concrete foundation
installing.



Ordering Code: 0268-0-9-
000-00
Glare Shield Ring for COB