ziiLUXE

F15Mono

FormPro Flex

Specifications:

Operating volts :	24V DC
Power :	5W/12W/15W per metre
Performance per metre:	>140lm(5W) / >350lm(12W) / >390lm(15W)
Working mode :	Constant voltage
LED type :	SMD3528/SMD5050/SMD5050
LED qty/metre :	72pcs/60pcs/72pcs
Available CT :	2200-6500K
Available colours :	R/G/B/A/O/P/Y
Min. cutting lengths :	166.7mm/100mm/83.3mm
Max length single feed:	15m/10m/8m
Max length double feed:	30m/20m/16m
Lead feed options :	In-line, side, bottom
Lead length :	600mm (up to 10m lead available to order)
Material :	Eco PVC
Protection rating :	IP68 Class 2
IK rating :	Protection against mechanical impact IK08
Min. bend diameter :	120mm
Beam angle :	120°
Dimmable :	Dali, 0/1-10, DMX, PWM
Flex direction :	Lateral flex (horizontal)
Lumen maintennce:	70,000Hrs L70 @ 25°C, 50,000Hrs L70 @ 50°C
Warranty:	5 Years

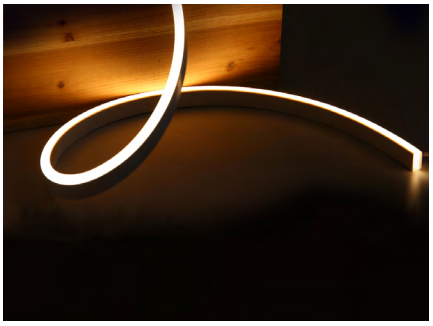

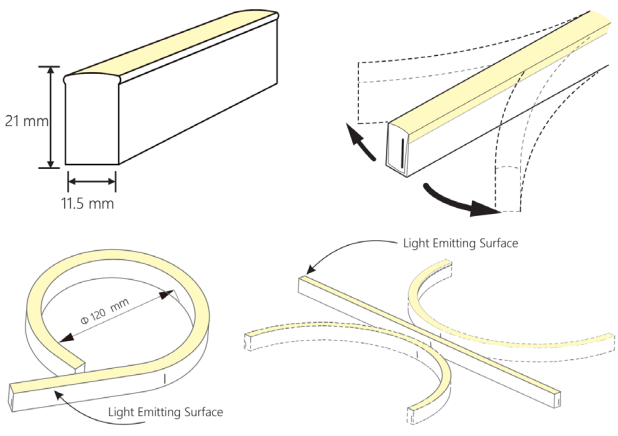

Description:

The Form Pro Flex F15Mono series provides a uniform strip of illumination, available in a flat finish, in a variety of colours and colour temperatures. With lateral (horizontal) flexibility this product can be utilized to suit a variety of residential, retail and commercial applications.

Features:

- Adopts SMD3528 & SMD5050 LED chips for a wide variety of performance.
- First grade eco-friendly UV resistant PVC, with seamless injection molded connections.
- Flat illuminated surface providing uniform illumination.
- Easy to install, various connections and mounting systems available.
- IP68 rating.

*Due to the constancy of product delevopment, we reserve the right to update all specifications without prior notice.

ziiLUXE is a registered trademark of Lime Lighting Pty Ltd. © 2019

ziiLUXE

F15Mono

FormPro Flex

Ordering code *(FPF15-24VCV5W-3000K)*

Product family	Product name	-	Input	Watts per metre	-	Colour temp / Colour
☑ FP	☑ F15		☑ 24VCV	☐ 5W		☐ 2200K
				☐ 12W		☐ 2500K
				☑ 15W		☐ 2700K
						☐ 3000K
						☐ 3500K
						☐ 4000K
						☐ 4500K
						☐ 5000K
						☐ 5700K
						☐ 6500K
						☐ Red (5w, 7.2w only)
						☐ Green
						☐ Blue
						☐ Amber (5w, 7.2w only)
						☐ Orange (5w, 7.2w only)
						☑ Pink
						☐ Yellow (12w, 15w only)

IP68 Mould injection connections:

Direct cable output



☐ FPAF15-IMD01-1W ☐ FPAF15-IMD03-2W

Side cable output





☐ FPAF15-IMS01-1WR ☐ FPAF15-IMS02-1WL ☐ FPAF15-IMS03-2W

Bottom cable output



☐ FPAF15-IMB01-1W ☐ FPAF15-IMB03-2W

*Due to the constancy of product delevopment, we reserve the right to update all specifications without prior notice.

ziiLUXE is a registered trademark of Lime Lighting Pty Ltd. © 2019

ziiLUXE

F15Mono

FormPro Flex

Mounting Profile:

Standard

Anodized aluminium alloy, surface mounted profile suitable for FPF15 FormPro Flex. Available to order in 1m, 2m, and 50mm lengths.



☐ FPAF15-MC
☐ 1000 ☐ 2000 ☐ 0050
☐ White ☐ Silver

Grip

Anodized aluminium alloy, surface mounted profile suitable for FPF15 FormPro Flex offering high grip for a strengthened hold. Available to order in 1m, 2m, and 50mm lengths.





☐ FPAF15-MCG
☐ 1000 ☐ 2000 ☐ 0050
☐ Anodized

Carrier

Anodized aluminium alloy, surface mounted profile suitable for FPF15 FormPro Flex allowing for concealed Leads. Available to order in 1m and 2m lengths.





☐ FPAF15-MCL
☐ 1000 ☐ 2000 ☐ 0050
☐ Anodized

SS Clip

316 Stainless Steel, surface mounted clip suitable for FPF15 FormPro Flex. Available to order in 50mm pieces.



☐ FPAF15-MCSSC
☐ 0050

Non Slip

Anodized aluminium alloy, surface mounted profile suitable for FPF15 FormPro Flex offering a non slip hold for a secure fit when inverted. Available to order in 1m, 2m, and 50mm lengths.





☐ FPAF15-MCNS
☐ 1000 ☐ 2000 ☐ 0050
☐ Anodized

SS Flex

Stainless Steel, surface mounted flexible profile suitable for FPF15 FormPro Flex allowing for secured bends and corners. Available to order in 100mm, 300mm, 500mm and 1000mm lengths.



☐ FPAF15-MCSSF
☐ 0100 ☐ 0300 ☐ 0500 ☐ 1000

Side Mount

Anodized aluminium alloy, surface mounted profile suitable for FPF15 FormPro Flex allowing for side mounting. Available to order in 1m, 2m and 50mm lengths.



☐ FPAF15-MCS
☐ 1000 ☐ 2000 ☐ 0050
☐ Black ☐ White ☐ Silver

Angle mounting bracket

Adjustable mounting bracket suitable for FPF15 profile. Available to order.



☐ FPAF15-ACB1

*Due to the constancy of product delevopment, we reserve the right to update all specifications without prior notice.

ziiLUXE is a registered trademark of Lime Lighting Pty Ltd. © 2019