

# ziilUXE


## Modular 13

### Origin



#### Specifications:

|                     |                                   |
|---------------------|-----------------------------------|
| Power :             | 13w (Total 14.5w inc. LED Driver) |
| Performance :       | 1035lm (3000K) 1100lm (4000K)     |
| Efficacy :          | 80lm/W                            |
| Operating Current : | 350mA                             |
| Beam Angle :        | 65° (Frosted lens)                |
| CRI :               | 93                                |
| Input Voltage :     | 100-240VAC                        |
| Output Voltage :    | 36VDC                             |
| Power factor :      | > 0.95                            |
| Available CT :      | 3000-4000K                        |
| LED type :          | Sharp COB                         |
| Material :          | Aluminum alloy                    |
| Protection rating : | IP44 Class 2                      |
| Dimmable :          | Yes                               |
| Lumen maintennce:   | 50,000Hrs                         |
| Warranty:           | 5 years                           |

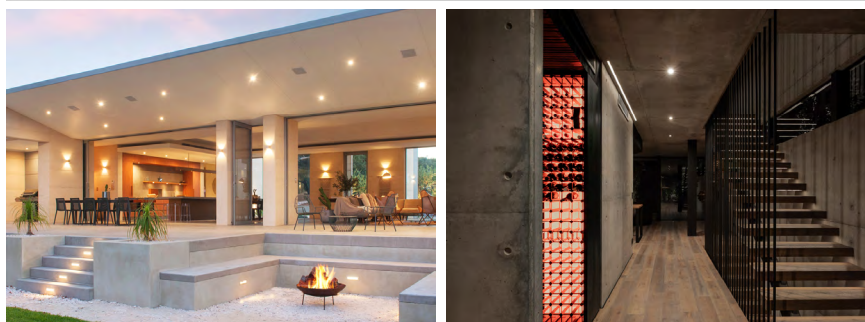


#### Description:

The Origin Modular 13 series provide a high CRI, high output downlighting solution available in a variety of fascia styles, colours and colour temperatures. this product can be utilized to suit residential, retail and commercial applications.

#### Features:

- Adopts high quality, CRI 93 Sharp LED chips.
- Black Aluminium Alloy integrated heat sync for efficient dissipation to maximise lifespan.
- Standalone LED Driver with large input terminals for efficient installation and serviceability.
- Frosted lens for visual comfort.
- Easy to install, various twist-lock fascias available to accommodate a wide range of design styles.

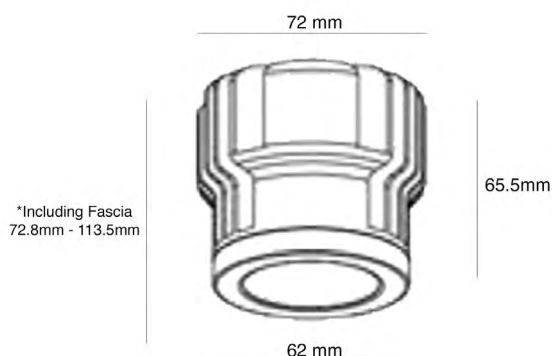

# ziilUXE

## Modular 13

### Origin

Ordering code (OMDLM13-6593-3000K)

| Product family | Product name | - Beam Angle | CRI | - Colour temp / Colour |
|----------------|--------------|--------------|-----|------------------------|
| OM             | DLM13        | 65           | 93  | 3000K<br>4000K         |

#### Fascia Options:

##### Round Gimbled

Powder-coated Aluminium gimbled fascia, suitable for the Origin Modular 13 Downlight series, universal in both form and function. Available in Matt White, Matt Black and Silver.

Size: 100mm(W) x 28mm(H)

Cutout: 90mm Diameter

Assembled Height: 72.8mm



OMFGRI -  W (Matt White)  
 B (Matt Black)  
 S (Silver)

##### Round Fixed

Powder-coated Aluminium fixed fascia, suitable for the Origin Modular 13 Downlight series, universal in both form and function. Available in Matt White, Matt Black and Silver.

Size: 100mm(W) x 28mm(H)

Cutout: 90mm Diameter

Assembled Height: 72.8mm



OMFFRI -  W (Matt White)  
 B (Matt Black)  
 S (Silver)

##### Square Gimbled

Powder-coated Aluminium square gimbled fascia, suitable for the Origin Modular 13 Downlight series, Available in Matt White, Matt Black and Silver.

Size: 100mm x 100mm x 28mm(H)

Cutout: 90mm Diameter

Assembled Height: 72.8mm



OMFGSI -  W (Matt White)  
 B (Matt Black)  
 S (Silver)

##### Deep Recess

Powder-coated Aluminium gimbled fascia, suitable for the Origin Modular 13 Downlight series providing low glare illumination. Available in Matt White, Matt Black and Silver.

Size: 110mm(W) x 55mm(H)

Cutout: 105mm Diameter

Assembled Height: 103.8mm



OMFGR2 -  W (Matt White)  
 B (Matt Black)  
 S (Silver)

##### Asymmetrical Deep Recess

Powder-coated Aluminium gimbled fascia, suitable for the Origin Modular 13 Downlight series providing asymmetrical low glare illumination. Available in Matt White, Matt Black and Silver.

Size: 120mm(W) x 58mm(H)

Cutout: 110mm Diameter

Assembled Height: 113.5mm



OMFGR3 -  W (Matt White)  
 B (Matt Black)  
 S (Silver)